




LIQUID LEVEL ALARMS

The BII Liquid Level Alarm can be used anywhere to detect high or low liquid level conditions. Applications include cisterns, residential sewage basins, sewage holding tanks or wet pits, sump basins and industrial holding tanks.

Installation of a BII Alarm is easy. Simply mount the BII Alarm indoors using hanger-hole in back panel. Suspend the float switch at an appropriate level using the picture as a guide. The power cord should be connected to a separate circuit from the pump circuit. This enables the BII Alarm to operate if the pump circuit fails.

Put switch in "Alarm Re-Set" position and the alarm is in operation. The unit can be tested by pushing the test switch in the direction of arrow.

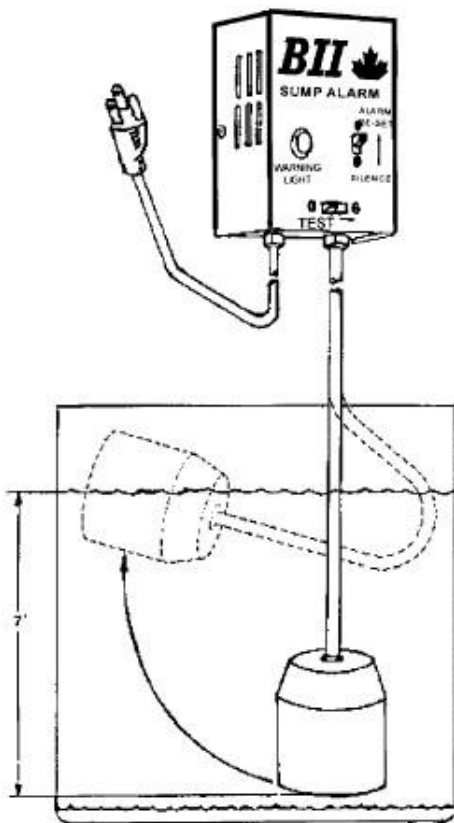

FEATURES

- Easy to Install
- Steel Enclosure
- Loud Horn Alarm
- Red Warning Light
- Alarm Re-Set/Silence Switch
- Push-to-Test Switch
- Canadian Standards Association Certified
- Switch Cord - 10' Standard
(Longer Switch Cord Lengths Available)
- Power Cord - 6'
- Two-Year Limited Warranty
- Non Mercury Float safe for potable water

SPECIFICATIONS

- Model: 850
Voltage: 120V/60 HZ/70 mA
Alarm Panel: EEMAC 1 (Indoor) Enclosure
6" X 4" X 2 1/2" Steel Enclosure
6' Power Cord (18/3 SVT) with Molded,
Grounded Plug (120V)
Red Warning Light
Alarm Re-Set/Silence Switch
Push-To-Test Switch
Horn: 106 dB @ 1' (86dB @ 10')
Switch: Heavy Duty Non-Mercury
Float Tilt Switch
Switch Cable: 10' Flexible 16 AWG
2-Conductor SJOW - Chlorinated
Polyethylene (CPE)
Water-Resistant Jacket
Maximum operating temperature: 140°F

PART NO.	DESCRIPTION	LIST PRICE-A
BLACK FLOAT - High Impact Polystyrene (HIPS)		
850H-10	High level alarm with 10' switch cord	130.78
850H-20	High level alarm with 20' switch cord	139.47
850H-30	High level alarm with 30' switch cord	151.67
850H-50	High level alarm with 50' switch cord	189.37
WHITE FLOAT - Acrylonitrile Butadiene Styrene (ABS)		
850L-10	Low level alarm with 10' switch cord	130.78
850L-20	Low level alarm with 20' switch cord	139.47
850L-30	Low level alarm with 30' switch cord	151.67
850L-50	Low level alarm with 50' switch cord	189.33

NOTE: Available in longer cord lengths. Please call your Sales Rep for more information.

NOTE: Dry contacts for remote signal available upon request.

ORDER MODEL 850HR OR 850LR. Longer cord lengths also available.